





514 mm

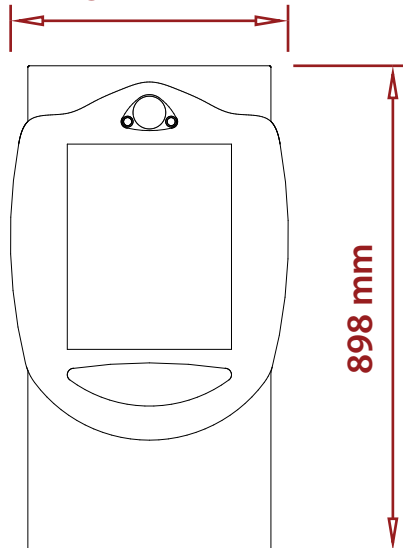

898 mm

225 mm

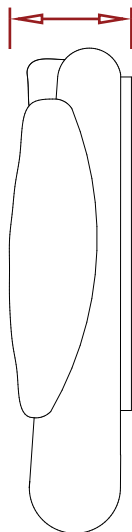

Video

	PAL	NTSC
Resolution	720 x 576	720 x 480
Frame Rate	25 fps	29.97 fps
Default File Format	AVI	AVI
Additional Formats	MP4, WMV, FLV, QuickTime, WebM, Ogg (on request)	

Audio

Microphones	1x Internal Microphone 1x External Microphone Socket via XLR (optional Phantom Power)
Speaker	1x Built-in Speaker

Hardware

Internal Storage	970GB Storage (Internal HDD)
Screen	19" Portrait LCD Touch Screen
Connectivity	2x Gigabit RJ45 Network Connections 1x Wireless N 150 Mbps Adapter 1x External USB Port
Lighting	Integrated LED light ring

Software

Operating System	Windows 7 Pro (32 Bit)
Software	VideoBooth 3 Software with interface builder and easily customisable screen flow, graphics, audio, video and data entry options.
Result Delivery	Export to USB Drive, FTP to server or copy over local network.

Specifications

Height	898 mm	35 ²³ / ₆₄ inches
Width	514 mm	20 ¹⁵ / ₆₄ inches
Depth	225 mm	08 ⁵ / ₆₄ inches
Weight	40 kg (assembled)	88 lb
	34, 06 kg (top, bracket)	75, 13 lb
Power	IEC Socket with regional mains cable included. Approximately 109W Consumption (@ at 220V)	

Optional Accessories

Transit Cases	Wheeled transit cases, International Shipping Case, Wooden Shipping Crate.
Accessories	Lighting Controller (0-10v or DMX), Wide Angle Lens, Contact Closure Input / Output Control, Chromakey Backdrop.

Support & Warranty

24 Months back to base warranty.
 Lifetime technical support by phone/web/email.
 Access to online help desk.