

Panel Dimensions

| | Exterior | | | Interior | | |
|-----|----------|----------|--------|----------|-------|--------|
| | Height | Width | Foamex | Height | Width | Foamex |
| C01 | | See Note | | - | - | - |
| C02 | 2223 | 792 | 1 | - | - | - |
| C03 | 2226 | 490 | 2 | - | - | 2 |
| C04 | 2223 | 792 | 1 | - | - | - |
| C05 | 2226 | 986 | 2 | - | - | - |
| C06 | 2223 | 792 | 1 | - | - | - |
| C07 | 2226 | 490 | 2 | - | - | - |
| C08 | 2223 | 792 | 1 | - | - | - |
| C09 | | See Note | | - | - | - |
| C10 | | See Note | | - | - | - |
| C11 | | See Note | | - | - | - |
| C12 | - | - | - | 489 | 1352 | 2 |
| C13 | - | - | - | 1200 | 1770 | 2 |

All measurements in mm.

Foamex refers to the recommended panel thickness.

Panel Notes

ALL Each panel has a 3.5mm edge inside which the branding fits within, therefore there is a 7mm gap between each branded panel.

ALL The booth has a solid white roof with down lighting white LEDs to highlight the artwork.

C03 Internal Panel is obscured by VideoKiosk, keep all important branding and text in the top 800mm of this panel

For these panels see separate drawing sheets:

C01 Booth Door Panel C01.pdf

C09 Booth Roof Panel C09~11.pdf

C10 Booth Roof Panel C09~11.pdf


C11 Booth Roof Panel C09~11.pdf

Bench Seat

C06 The booth can be setup in either a standing or
C07 seated arrangement. A bench seat can be
C08 added to the booth, this will cover the lower section of the interior panels .

C12 An additional piece of branding is required for the front of the bench seat.

C13 An optional panel can be fitted above the seat which covers the sound proof foam lining of the interior wall behind the seat.

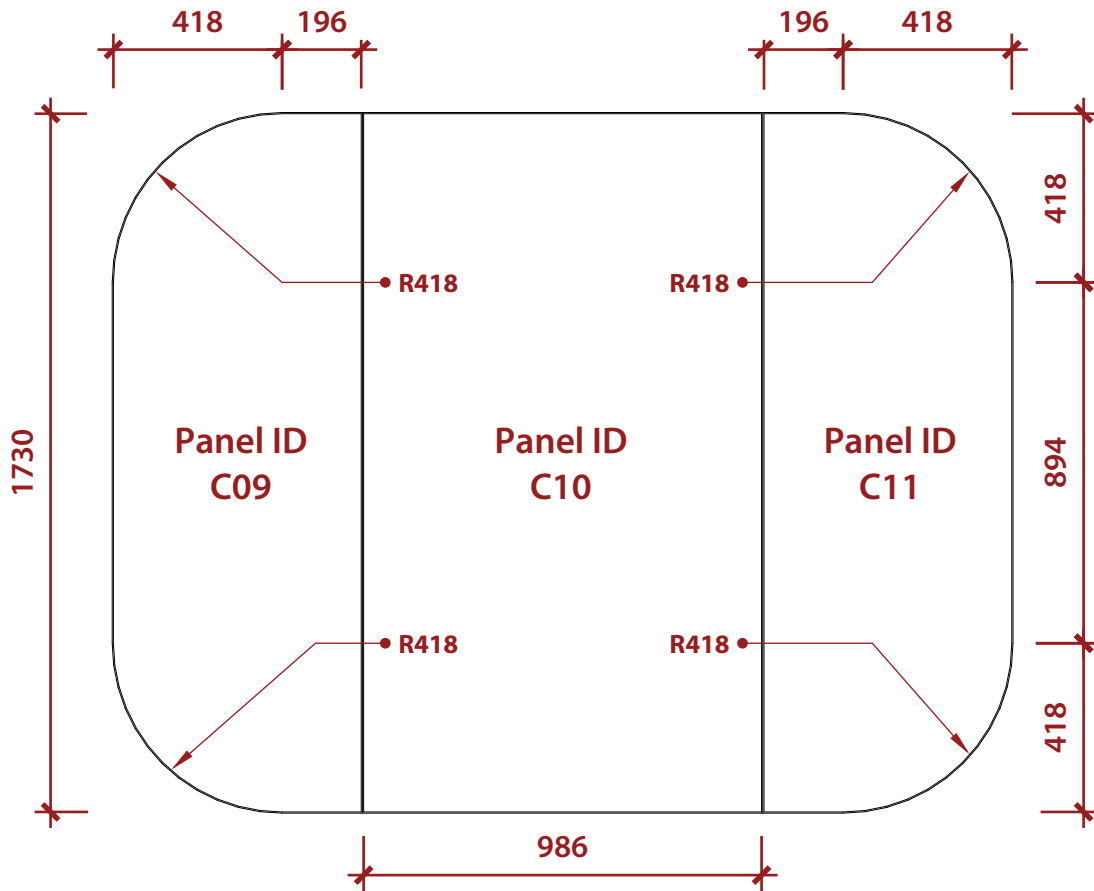

Artwork Instructions

If you are creating artwork using various software applications, artwork does NOT need to be made to full size.

We recommend creation at 25% of the finished size - please keep dimensions in proportion to the finished artwork size.

Important Notes

All colours within the document should be CMYK - we convert all other colour formats including Pantone colours to CMYK.

Allow 2mm bleed where text or pictures bleed off of edges.

We recommend logos be created in Illustrator, Freehand or Corel Draw and vectorised.

Change any fonts to vectors and save artwork as EPS or native application format. This provides better quality at any size than scanned logos or type.

File Format

HI-RES print ready PDF with trim-marks + 2mm bleed.

Submitting Your Files

Please supply each branding panel as an individual file named by its panel id (for example A02,B06 or C08).

Files can be sent to us using our online transfer tool here: <https://videobooth.wetransfer.com/>

Click "Add Files" and check the address reads incoming@videoboothsystems.com

Enter your email address and a project reference in the message field.

Click Transfer.

